

MOEN® 摩恩

Specifications

DESCRIPTION

- G1/2 inlet connections
- Metal construction with various finishes identified by suffix

OPERATION

- Controlled by induction

FLOW


- Water flowrate is about 1.98L /min to 4.5 L/min at 0.1 MPa.
- Water flow difference is limited to 1.98 L/min minimum from 0.1 MPa to 0.3 MPa

STANDARDS

- Designed to meet CJ/T 164 ; GB 25501(Grade 1)
- Power supply: DC6V adapter or 4 AA1.5V batteries

WARRANTY


- 5 years limited warranty against leaks and drips
- 2 year warranty against electronic operation

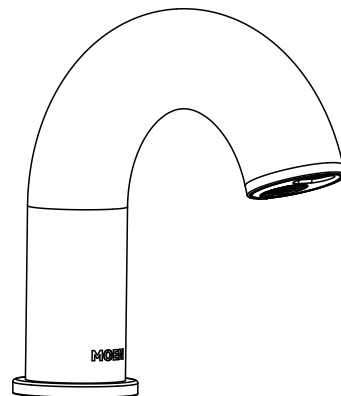

Sensor

Single-Mouth Sensor Lavatory Faucet

MODELS: GN86120 series

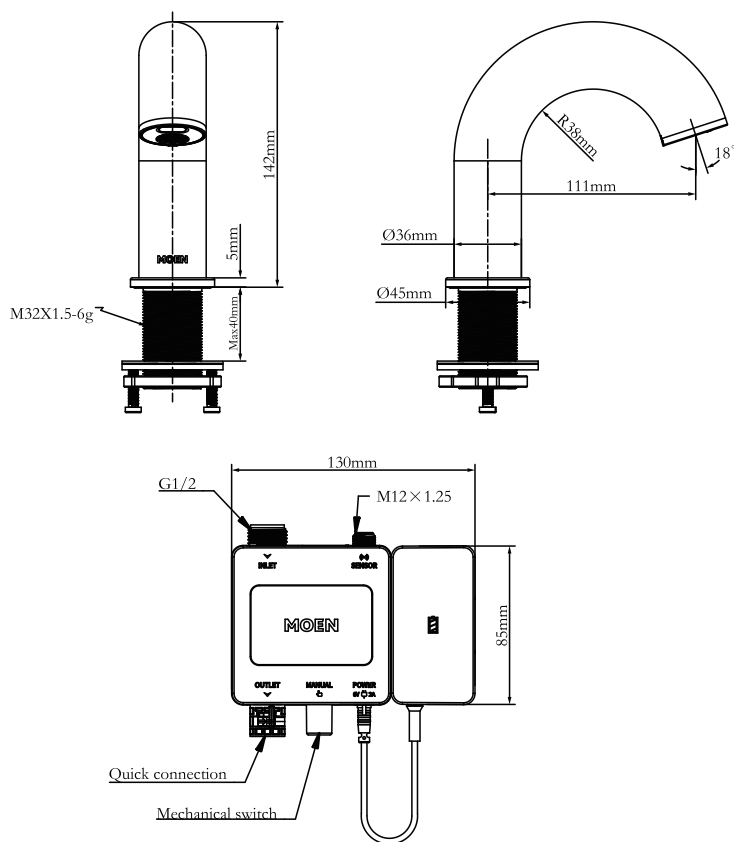

CRITICAL DIMENSIONS DO NOT SCALE