

描述

- 釉面陶瓷小便器
- 产品规格: L:326 × W:345 × H:648 (mm)
- 给排水方式: 后进墙排
- 冲水方式: 内置感应式 (感应冲水一次, 离开冲水一次)
- 冲水周期: 一个周期两段冲水
- 启动压力 (感应阀能够正常开启和关闭的水压范围): 0.05MPa~0.8MPa
- 推荐工作压力: 0.1MPa (动压) ~0.5MPa (静压)
- 小便器感应冲水阀供水管道: 正常使用最小流量>0.3L/S
- 名义用水量: ≤1.5L (一个周期)
- 水效等级: 2级
- 感应时间: 2秒
- 感应距离: 67±5cm (对标准白板)
- 电源电压: DC6V或AC220V


执行标准

- GB/T 6952-2015 《卫生陶瓷》
- CJ/T 194-2014 《非接触式给水器具》

注意: 当选择冲洗阀和配件时, 请使用推荐的产品, 可咨询摩恩经销商或拨打摩恩热线。

* 图中所示均为参考尺寸。


SKU编号	冲洗阀	感应器	推荐冲洗阀
SW6151HPG	√	√	已内置

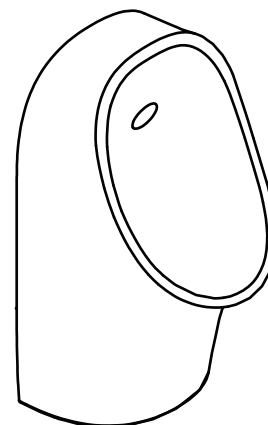

凯瑞系列
陶瓷小便器

型号: SW6151HPG

() 内的数值为推荐尺寸

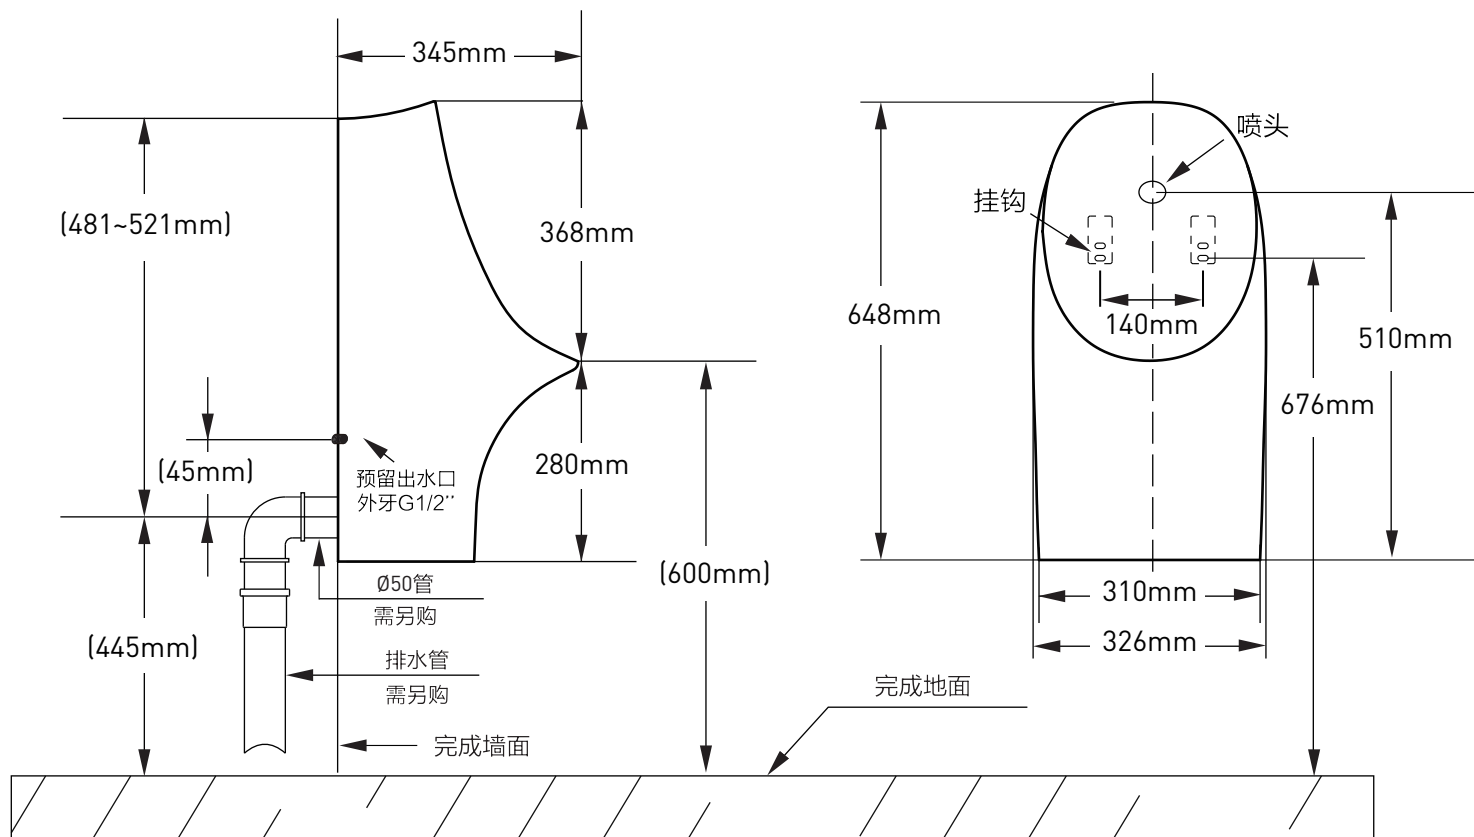


Specifications

- Glazed ceramic urinals
- Product specifications: L: 326 × W:345 × H:648 (mm)
- Water supply and drainage mode: rear wall row
- Flushing mode: Built-in Sensor (Sensor work flush once, leave flush once)
- Flush Cycle: Twice flushing a cycle
- Working Pressure Range (The water pressure range that the induction valve can normally open and close): 0.05MPa~0.8MPa
- Recommend Working Pressure Range: 0.1MPa (Dynamic Pressure) ~0.5MPa (Static Pressure)
- Urinal touchless flush valve water supply line: Minimum flow under normal use> 0.3L/S
- Flow rate: ≤1.5L/A cycle
- Water efficiency rating: Level 2
- Sensing time: 2s
- Sensor range: 67±5cm (for standard white board)
- Supply voltage: DC6V or AC220V

- GB/T 69052-2015 Sanitary Ceramics
- CJ/T 194-2014 Non-contact Water Supply Devices

* All shown in the picture are reference dimensions

SKU NO.	Flush Valve	Sensor	Recommended Flush Valve
SW6151HPG	✓	✓	Built into the product

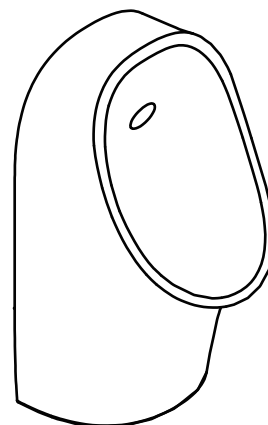

Kerry Series
Ceramic Urinals
Models: SW6151HPG

Values in () are recommended dimensions

