

## 描述

- 釉面陶瓷小便器
- 产品规格: L:345 × W:385 × H:1100(mm)
- 给排水方式: 后进地排
- 推荐工作压力: 0.1MPa (动压) ~0.5MPa (静压)
- 小便器感应冲水阀供水管道: 正常使用最小流量>0.3L/S
- 名义用水量: ≤1.5L(一个周期)
- 电源电压: DC6V或AC220

• GB/T 6952-2015 《卫生陶瓷》

注意：当选择水龙头和废弃物时，请使用推荐或咨询摩恩经销商或拨打摩恩热线。

\* 图中所示皆为参考尺寸




## 凯瑞系列

陶瓷小便器

型号: SW6152HS

SKU编号	冲洗阀	感应器	推荐冲洗阀
SW6152HP	×	×	SWA981HAM

( ) 内的数值为推荐尺寸

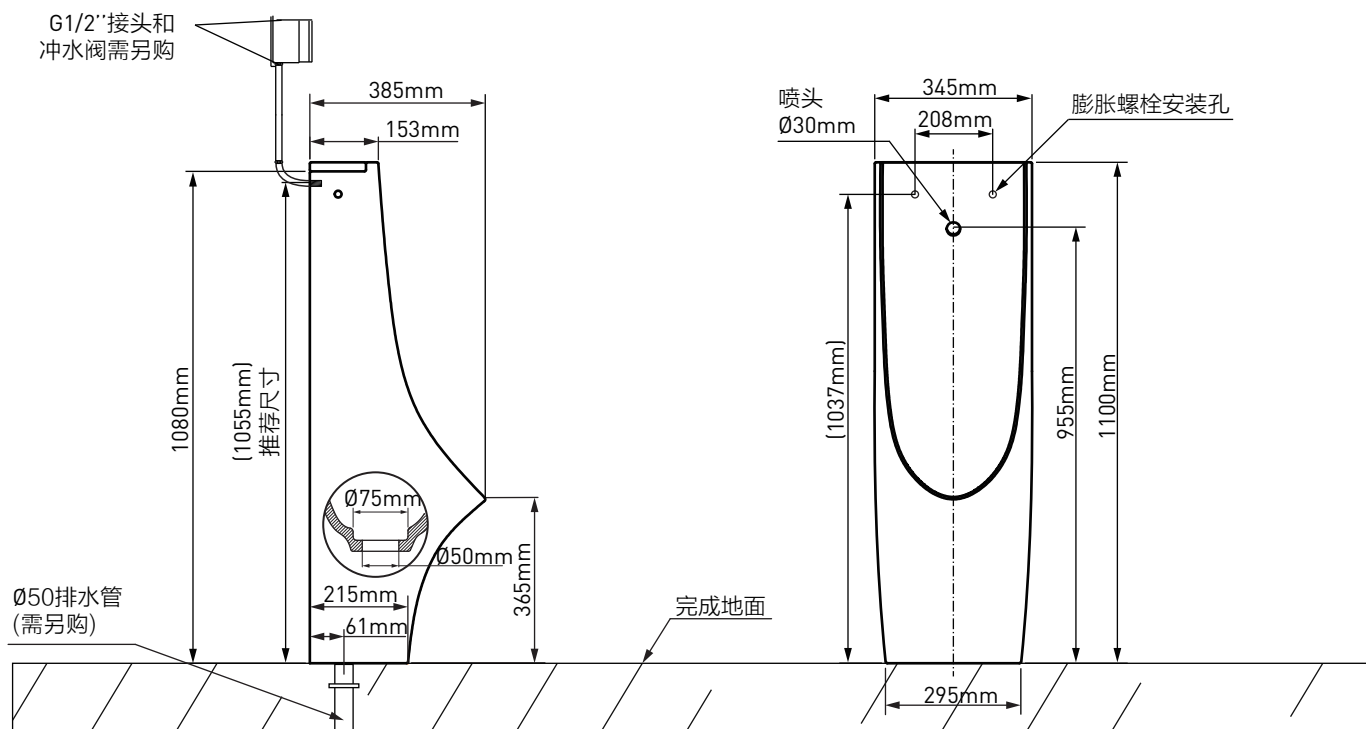

CRITICAL DIMENSIONS DO NOT SCALE

### DESCRIPTION

- Glazed ceramic urinals
- Product specifications: L:345× W:385 × H:1100(mm)
- Water supply and drainage mode: Rear supply and ground drain
- Recommend Working Pressure Range: 0.1MPa (Dynamic Pressure) ~ 0.5MPa (Static Pressure)
- Urinal touchless flush valve supply line: Minimum flow under normal use> 0.3L/s
- Flow rate: ≤1.5L/A cycle
- Supply voltage: DC6V or AC220V

- GB/T 6952-2015 Sanitary Ceramics

NOTE: When choosing faucets and waste, Please use recommendations or consult a Moen dealer or call the Moen hotline.

\* All shown in the picture are reference dimensions




KERRY

Ceramic Urinal

Models: SW6152HS

SKU NO.	Flush Valve	Sensor	Recommended Flush Valve
SW6152HP	×	×	SWA981HAM

Values in () are recommended dimensions

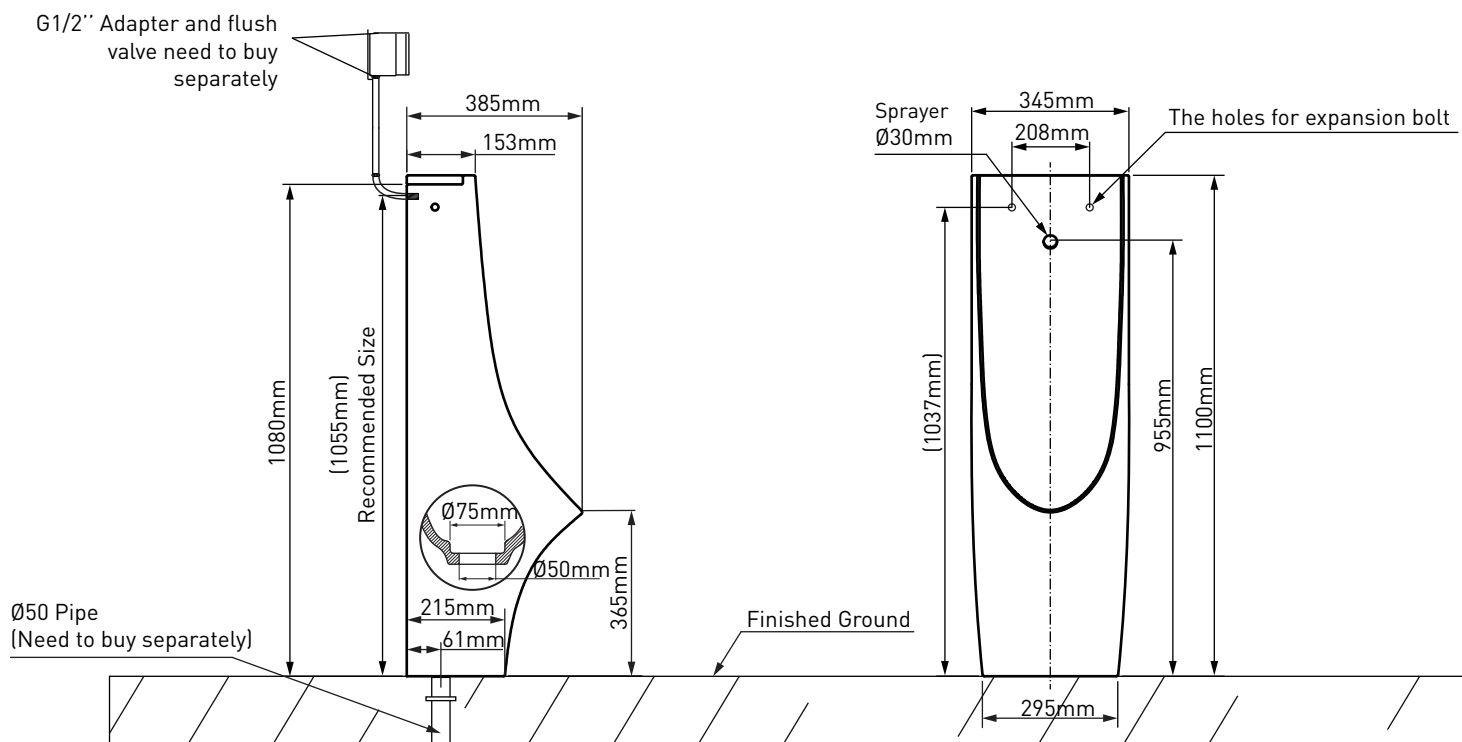

CRITICAL DIMENSIONS DO NOT SCALE